

# VP-127MX2-M/C21H

127-Megapixel Thermoelectric Peltier Cooled Camera  
with CoaXPress 2.0 Interface



**CoaXPress**<sup>®</sup>

The VP-127MX2-M/C21H, the latest model of the industrial proven VP series, is a new 127-Megapixel CoaXPress camera and adopts the cutting-edge High Speed CMOS Image Sensor. The VP-127MX2-M/C21H camera offers up to 21.9 frames per second at 13,376 × 9,528 resolution. This camera uses thermoelectric Peltier (TEC) cooling technology developed for and used by many demanding medical market customers. The TEC maintains the operating temperature of the image sensor at up to 15 degrees below ambient temperature. The VP-127MX2-M/C21H camera provides a stable operating condition and the ability to expose for a long period of time to increase camera sensitivity. Featuring the stable operating capability and high resolution, this camera is ideal for demanding applications such as FPD, PCB and semiconductor inspections.

# VP-127MX2-M/C21H

Ultra High Resolution CMOS Digital Camera

## Main Features

- Thermoelectric Peltier Cooled – 15°C below
- 127-Megapixel Resolution
- CoaXPress 2.0 Interface up to 21.9 fps at 50 Gbps using 4 Channels
- Global Shutter CMOS Technology
- DSNU and PRNU Correction
- Flat Field Correction with Sequencer Control
- Hot Pixel Correction
- Defective Pixel Correction

## Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning

## Specifications

Model	VP-127MX2-M/C21H	
Resolution (H × V)	13376 × 9528	
Sensor	SONY IMX661	
Sensor Size (Diagonal)	46.15 mm × 32.87 mm (56.73 mm)	
Pixel Size	3.45 μm × 3.45 μm	
Interface	CoaXPress 2.0 (CXP-6/10/12)	
Max. Frame Rate	1 CH	8.8 fps
	2 CH	17.9 fps
	4 CH	21.9 fps
Exposure Time (1 μs step)	1 μs – 60 s	
Binning	Sensor (12, 14 bit)	Horizontal and Vertical Dependent: ×1, ×2
	Logic	Horizontal and Vertical Independent: ×1, ×2, and ×4(Mono Only)
Pixel Data Format	Monochrome	8/10/12/14 bit
	Color	RG Bayer 8/10/12/14 bit
Electronic Shutter	Global Shutter	
Exposure Mode	Timed, Trigger Width	
Dynamic Range	73 dB at 14 bit	
Gain Control	Analog	1× ~ 12×
	Digital	1× ~ 32×
Black Level Control	0 ~ 1023 LSB at 14 bit	
Dimension / Weight	110 mm × 110 mm × 89 mm, 1.45 kg (with M-72 mount)	
Cooling Performance	15±2°C below ambient temperature – Standard cooling with a fan	
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Trigger Synchronization	Free-Run, Hardware Trigger, Software Trigger, UserOutput0, CXP, Timer	
External Trigger	3.3 V ~ 24.0 V, 10 mA, Logical Level Input, Optically Isolated	
Software Trigger	Asynchronous, Programmable via Camera API	
Lens Mount	M72-mount, Custom mount available upon request	
Power	External	11 ~ 24 V DC
	Dissipation	Typ. 36 W
Compliance	CE, FCC, KC	
API SDK	Vieworks Imaging Solution 7.X	


# VP-127MX2-M/C21H

Ultra High Resolution CMOS Digital Camera


## Relative Sensitivity Curves

\* The sensitivity data may not match the measurement on the finished product necessarily because it is measured based on the wafer.


### IMX661 Monochrome

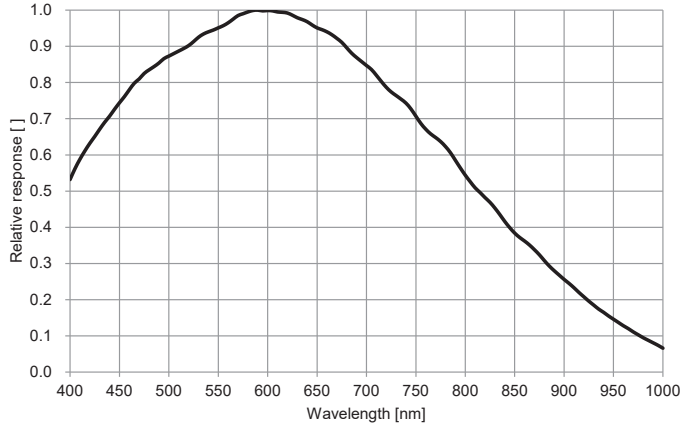

### IMX661 Color

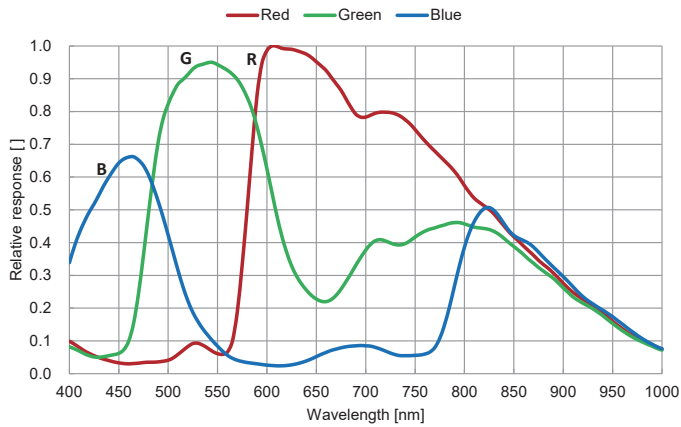


## Ordering Scheme

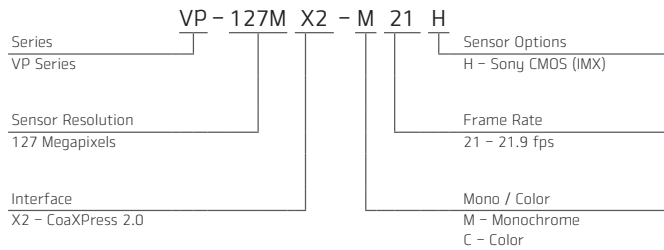


## Connector Specification

### Power



1, 2, 3: +12V DC  
4, 5, 6: GND  
(HR10A-7R-6PB)


### Control



1: Trigger IN+  
2: Trigger IN-  
3: Strobe Out-(GND)  
4: Strobe Out+  
(HR10A-7R-4S)

### Data Transfer / Communications

#### Micro-BNC



CH1 CH2 CH3 CH4

CH1: Master Connection  
75 Ω, Micro-BNC (HD-BNC)

Connectors on camera body

# VP-127MX2-M/C21H

Ultra High Resolution CMOS Digital Camera

## Mechanical Dimensions

Unit: mm

